

## HAK2 (Cash Deposit Machine)




- RGB 이미지, 적외선, 광학센서 등을 통한 지폐 입금처리
- 초음파 센서를 통한 이매검지 기능
- 초당 최대 2매 입금처리 속도
- 최대 100매 에스크로 기능 탑재
- 최대 3000매 적재가능 카세트

제품형태	카세트 Type
픽업/리젝트 용량	최대 100매
에스크로 용량	최대 100매
카세트 용량	최대 3000매
지폐 픽업 방향	종방향
지폐 사이즈	60-79(W) / 120-166(L)
이매검지 기능	초음파 센서
입금속도	초당 약 2매
Communication	RS-232C Async / USB 2.0(이미지 전송)
전원	DC24V
사이즈(W*D*H)	156*435*670(mm)

# HAK2 Specification


## HAK2\_ESCROW & STACKER

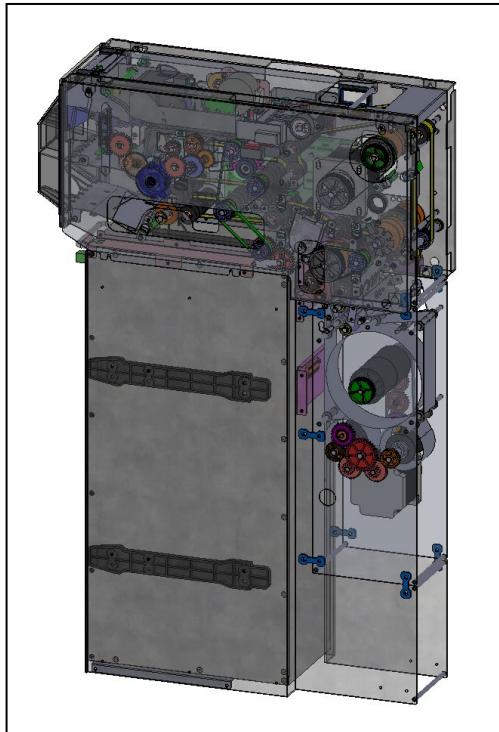

Spec / Model	HAK2 Deposit machine
Deposit Speed	<b>2 note/sec</b>
Deposit/Dispense Direction	Vertical Short Edge
Deposit/Loading Capacity	<b>Max 3,000 notes (Cassette)</b>
Max Deposit/Dispense Capacity	<b>Max 100 notes</b>
Escrow Capacity	<b>Max 100 notes(Tape escrow)</b>
Reject Capacity	<b>Max 100 notes</b>
Media Size(mm)	60-79(W) / 120-166(L)
Stacker	Cassette type
Media Separation	Retard and Friction(HGS)
Double Detection	Ultra Sonic
Validation Check	Length, Distance
Stacking Type	One by One Stacking to CST
Shutter	Automatic
Scanning and SNR	Yes
Light Source	RGB+IR
Acceptable Media	Bank Note, Gift Card(Barcode)
Maintenance Type	Front Service
Interface	RS-232C / USB 2.0 for IMG
Power	DC 24V
Size(mm) (W*H*D)	1 CST

# LAY-OUT Dimension

## HAK2\_ESCROW & STACKER

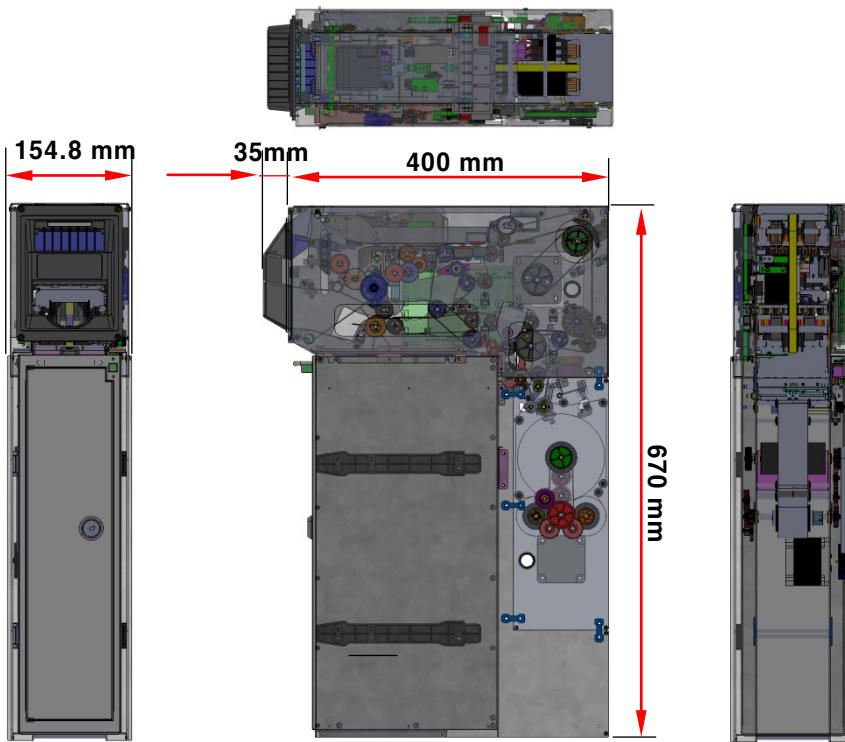

⟨ Stacker\_cassette type ⟩

